K-Wellness FSDU (Perm)

Technical development design brief

28th September 2026 – V1

Content

2. Project background
3. Creative design intent
4. Objectives
5. Solution suggestions
9. Sustainability & electrical power
10. Scope and forecast
11. Transport & installation
12. Durability and testing
13. Response requirements

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Project background

This project started life as a standalone branded FSDU. However, because there was no single parent brand, there was no third-party funding. The trading category team were confident that they could secure funding from the smaller independent brands and pool the fund towards a Boots owned design FSDU.

This change of direction meant we could change the design to our own specifications. Meaning we had better control of budget, durability and flexibility.

The original design was a semi-perm FSDU with an MDF core clad in plastic sheet material to achieve the look and feel. This approach would have been compliant if it was funded externally, however, we would not continue with this approach as a Boots funded project.

During this transition phase of the project, the overarching BVI also changed from yellow to blue. So, the creative direction changed accordingly.

This brief is the culmination of the new BVI, future flexibility, merchandising principles, durability and value for money.

To achieve the October launch date, the only option available is to produce a card unit. Followed up with a metal design that can be manufactured over a longer time frame in Asia. This will replace the card version. The cost for this activity is estimated at being lower than producing a metal unit in the UK.





© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Creative design intent


The ISE team have identified a need for a permanent FSDU location, and this project presents a unique opportunity to develop a new flexible fixture.


The closest piece of BAU kit we have in our estate is the SOTF Podium. This podium has multiple variants for different departments (Beauty, Photo, Baby & Healthcare). But the artwork associated to the different departments is not transferable.

A new FSDU design would need to have updatable POS and have flexible shelving, unlike the current podium design.

The layout footprint of the BAU podium (501x451mm) is also closely aligned to the new K-Wellness FSDU (500x500mm).

K-Wellness FSDU

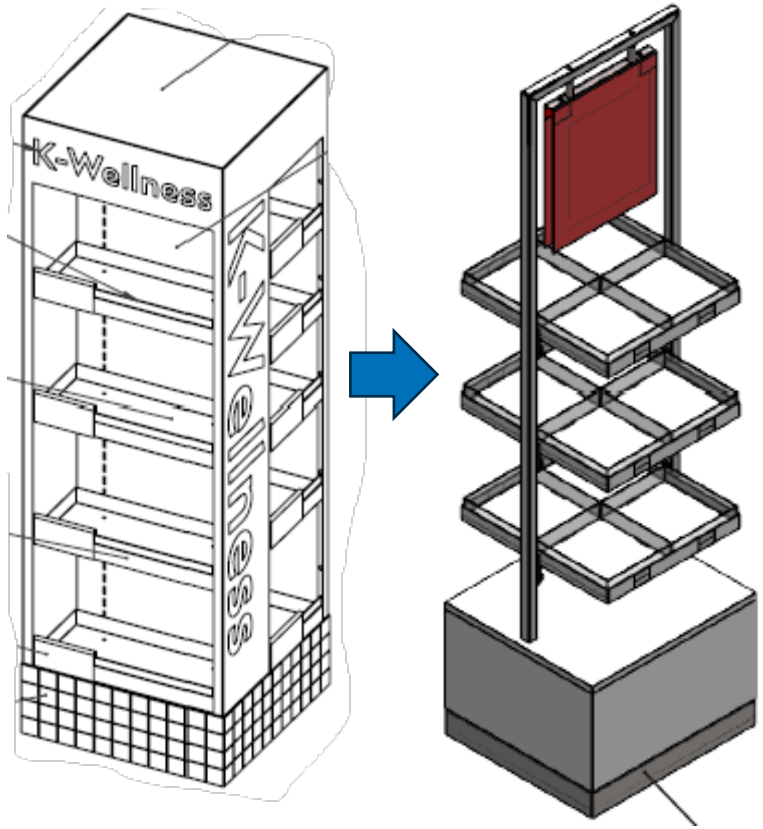

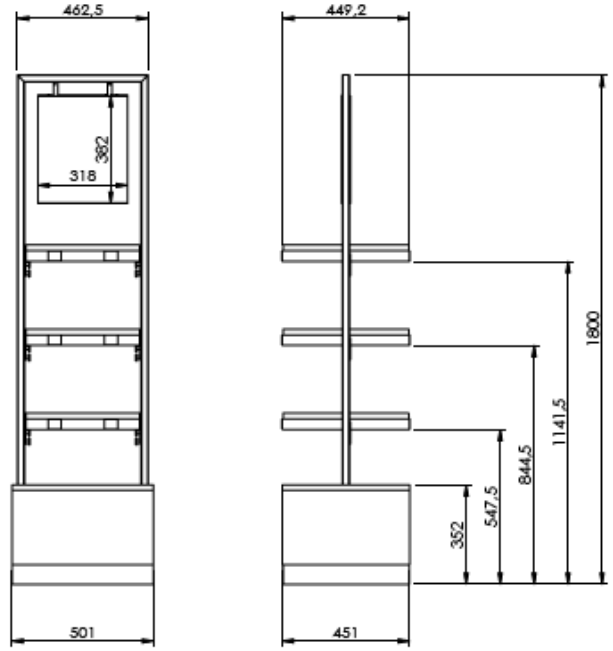

SOTF Podium

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.


Objectives

We aim to maintain consistent visual identity and technical standards across all of our retail stores. Every new fixture must meet defined criteria to ensure customers, colleagues, and contractors interact with them easily and intuitively.

This is achieved through:
- **Boots Visual Identity (BVI):** Creates a cohesive in-store experience and reinforces brand consistency.
- **Boots Furniture Design Guide (BFDG):** Ensures compliance with technical specifications and health & safety standards.

General objectives for this brief

- All materials to be impervious to alcohol or solvent corrosion
- Follow merchandising standard mod widths where possible – (N/A for this project)
- Not to rely on structural fixings to elements of the store architecture, such as floors, walls or columns
- Doors and drawers to have security as a consideration. Digital locks are not in scope for this brief
- Integrate with BAU Boots fixtures, fittings & display aids - (N/A for this project)
- Internal stock capacity is not relevant for this brief
- Any stock display must have provision for 35mm shelf edge strips to display price and or product offers
- Operational barcodes for stock should be considered – EPOS tickets will negate this requirement
- Any illumination and associated electrical components to be easily accessible and serviceable – N/A
- Tester products are out of scope for this brief
- On fixture navigation signage should be considered
- Consideration for digital content. Out of scope for this brief
- Installation to be per unit and minimal on-site assembly
- Low volume, short lead-time & high-volume, long lead-time manufacturing options (UK/Europe/Asia)
- Updateable POS, both on-shelf and on-fixture need to be a high priority
- Shelving positions to be fixed to standard Boots slotted upright vertical pitch of 31.75mm

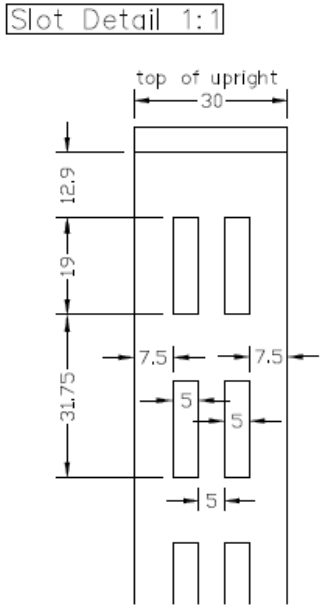



31.75mm
vertical pitch

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.


BR099X– Boots Generic FSDU (K-Wellness 2026)

The new metal FSDU will be manufactured from sheet steel and powdercoated in a neutral colour, suitable for generic use.

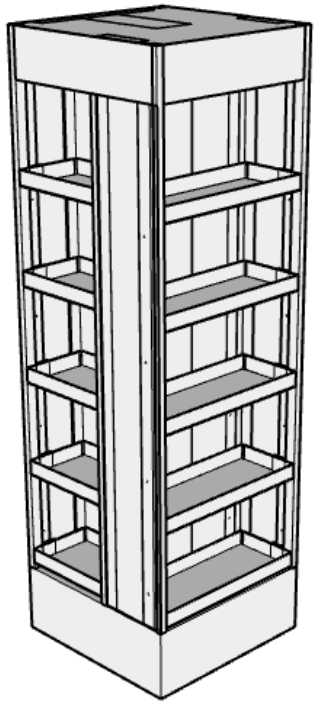




Indicative CAD cell

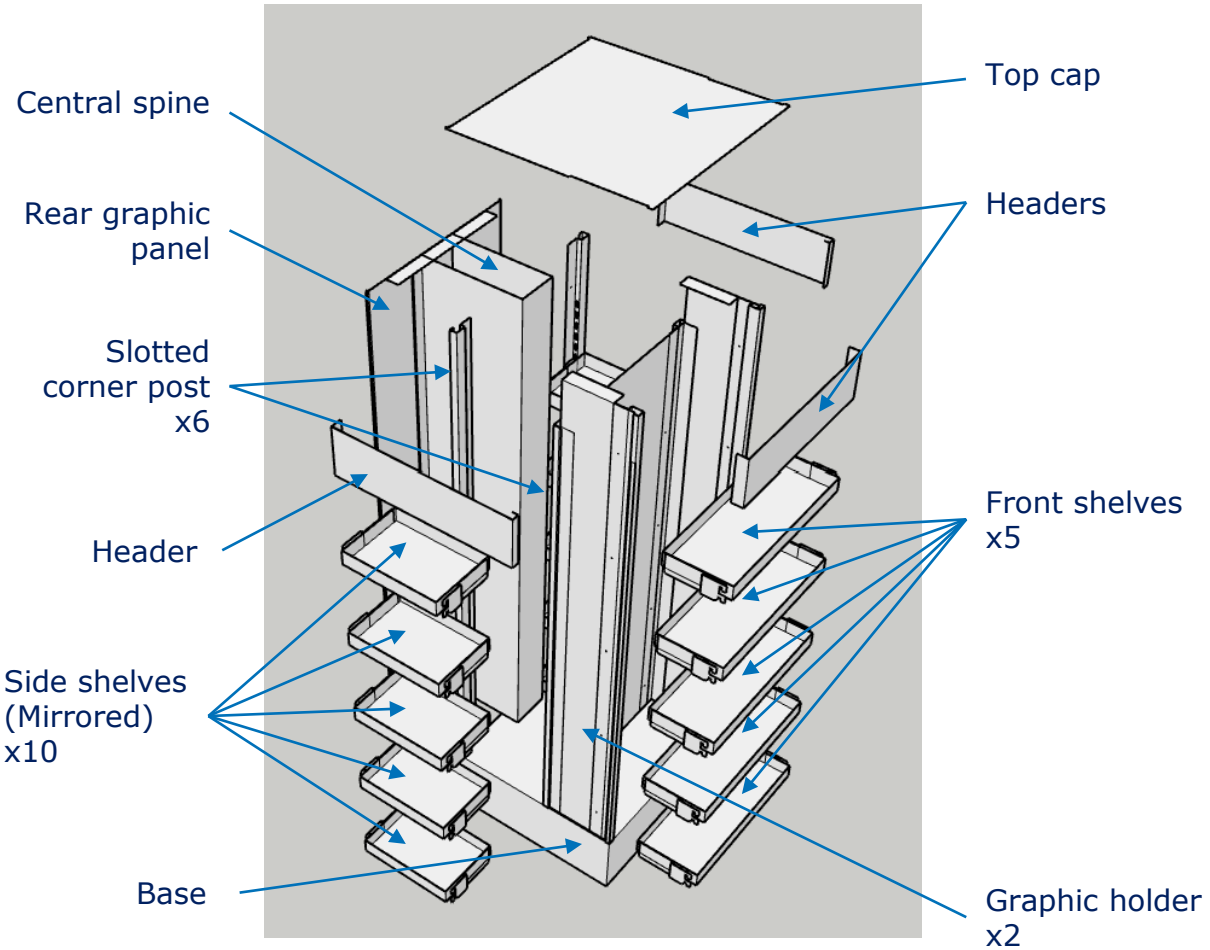

FSDU exploded view

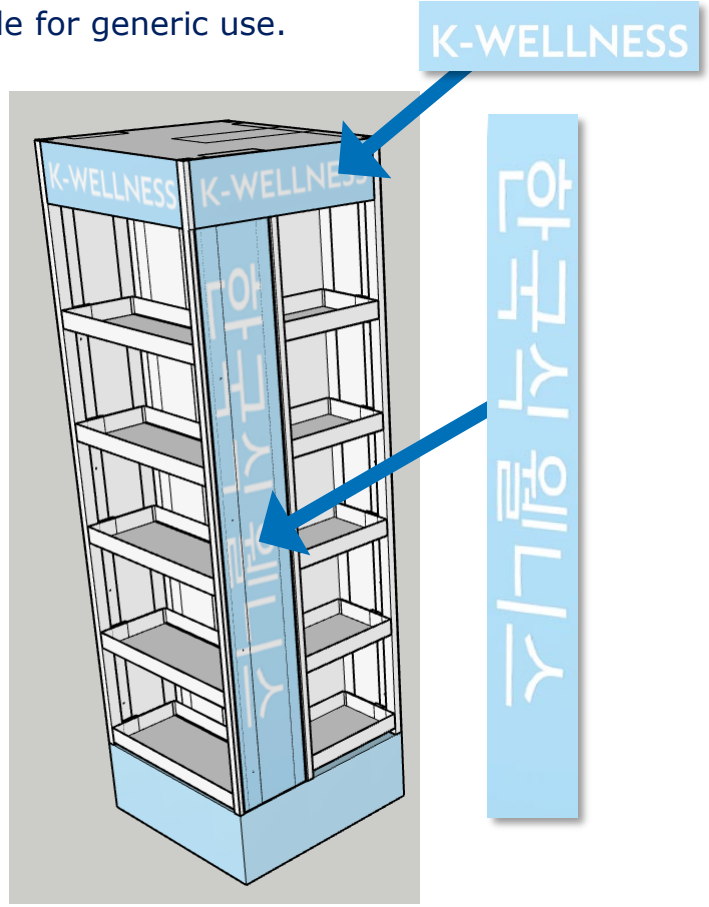



A combination of magnetic graphics and card inserts can be used to change the BVI or category

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.


BR099X– Boots Generic FSDU (K-Wellness 2026)

The shelves on the FSDU will need to be height adjustable. In this proposal, we think that reverse facing slotted uprights fabricated into the corner posts could be an option.

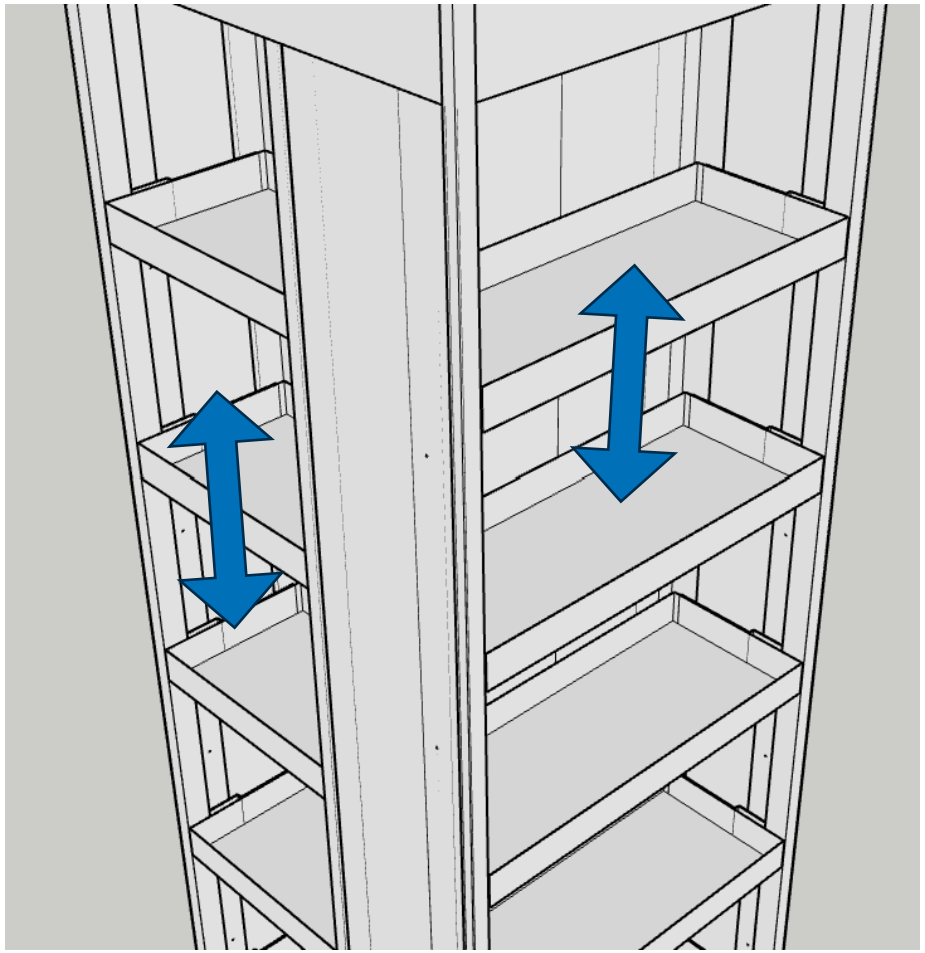

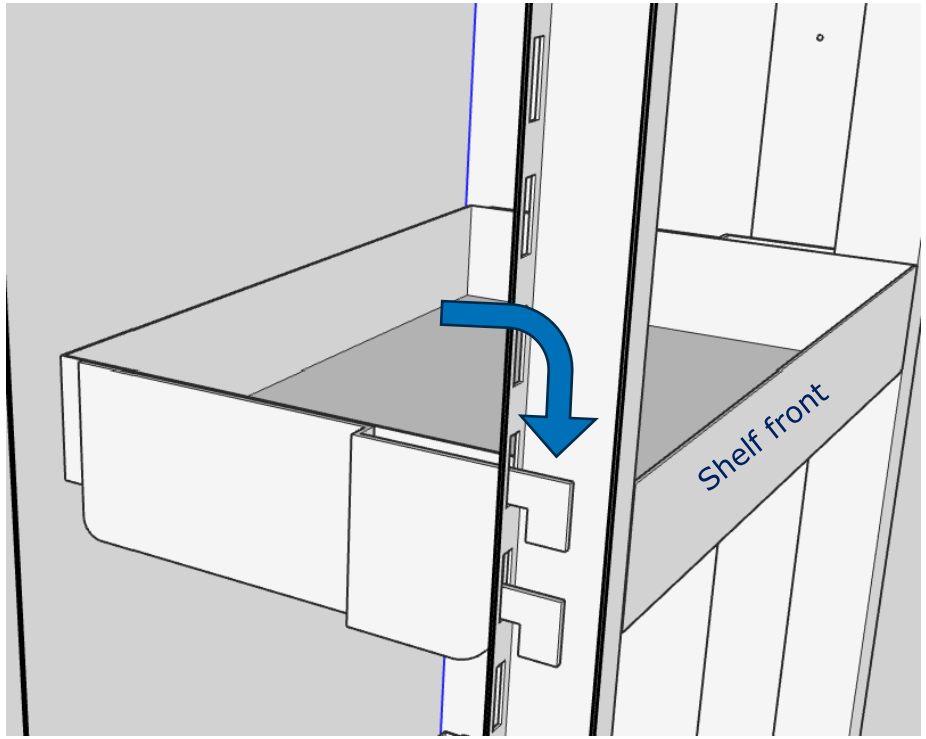

Sectional view through corner post. Hooked bracket connects into slotted upright from behind

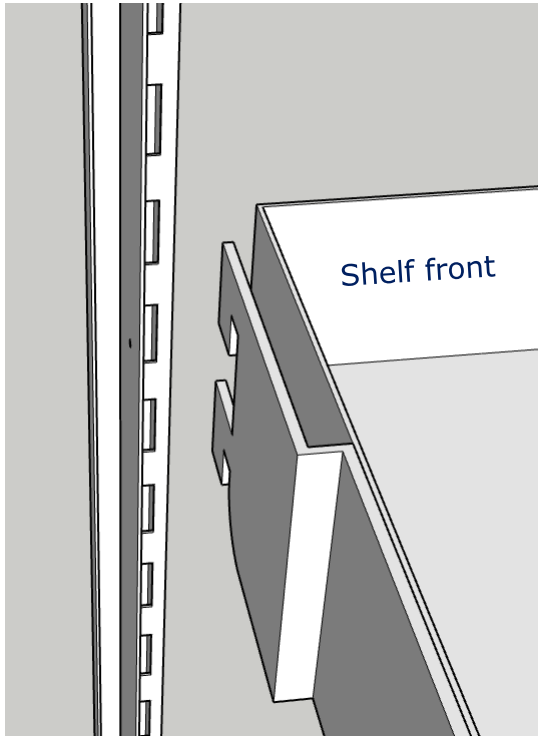


Shelf tray would have welded or riveted hooked brackets. Not separate brackets


© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

BR099X– Boots Generic FSDU (K-Wellness 2026)


General construction methodology – The metal structure of the FSDU should use simple folded sheet steel where possible. Although not exactly the fabrication shown on this page, the principle of design and manufacture should be included in the final design.

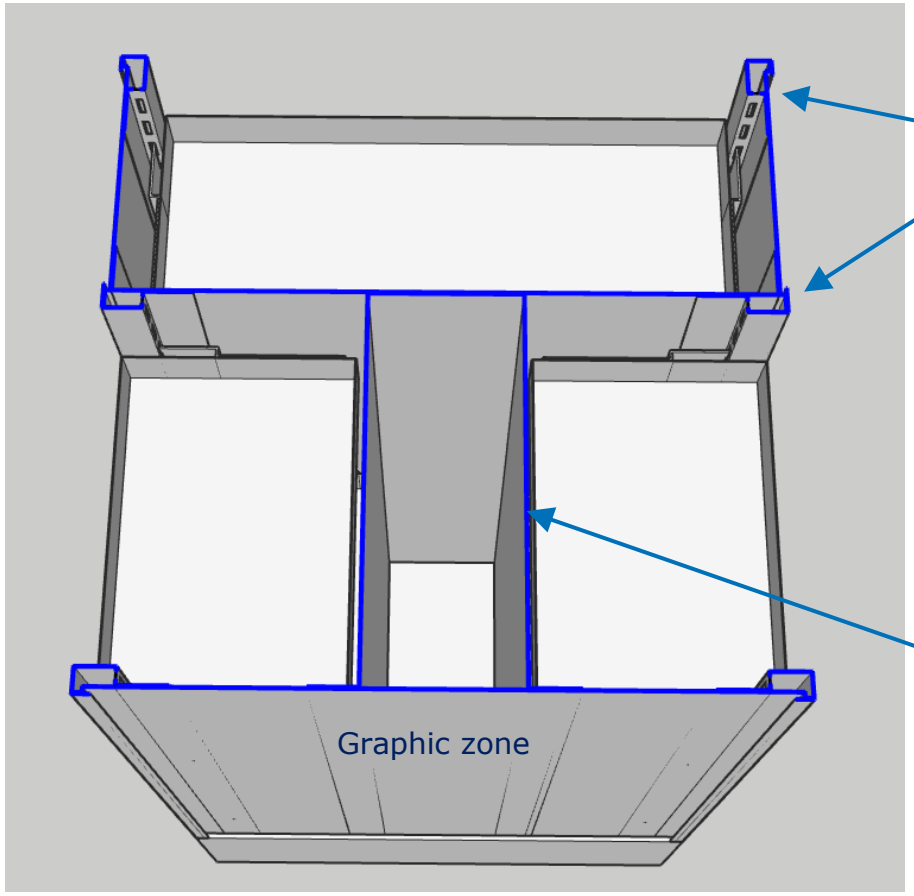

Section through core assembly




Corner profiles form the structural rigidity and serve as slotted uprights. These could also be a uniformed section design



Top hat section used to create the rear of the side shelves and form the central core


Close-up detail of corner section

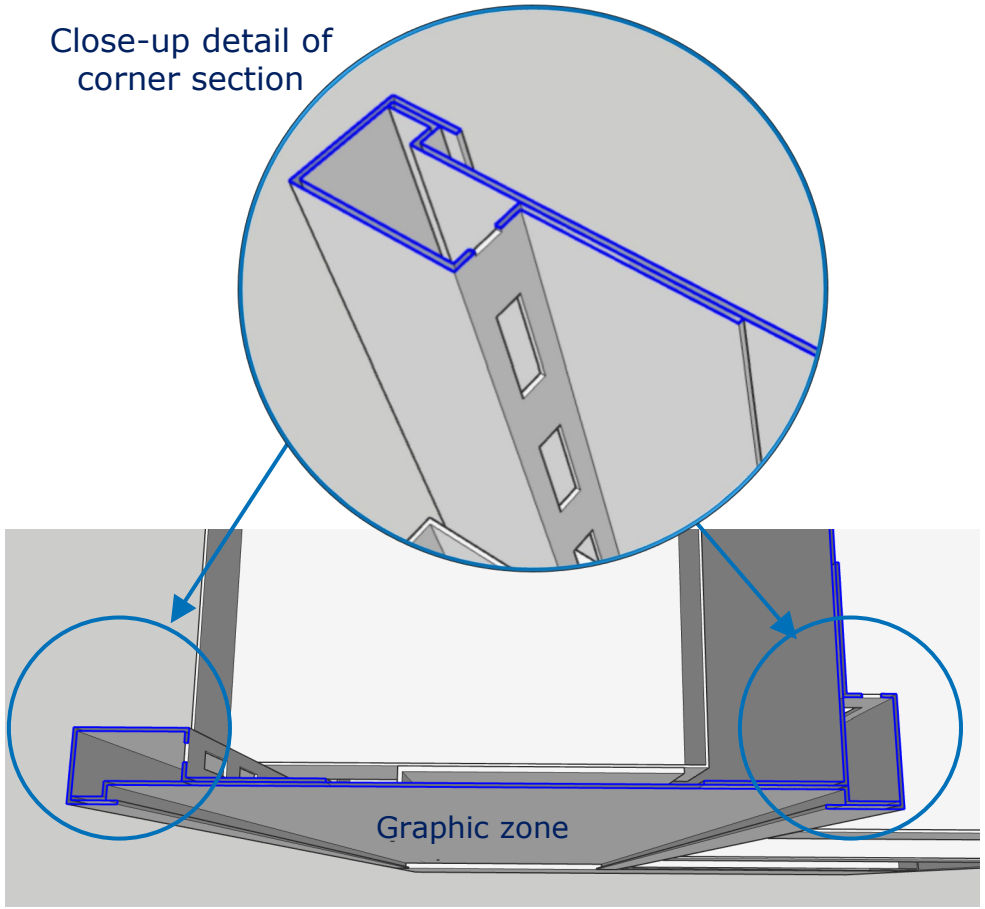

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.


BR099X– Boots Generic FSDU (K-Wellness 2026)

The main FSDU should be neutral in colour. The Boots Visual Identity (BVI) can be governed by updatable graphics.

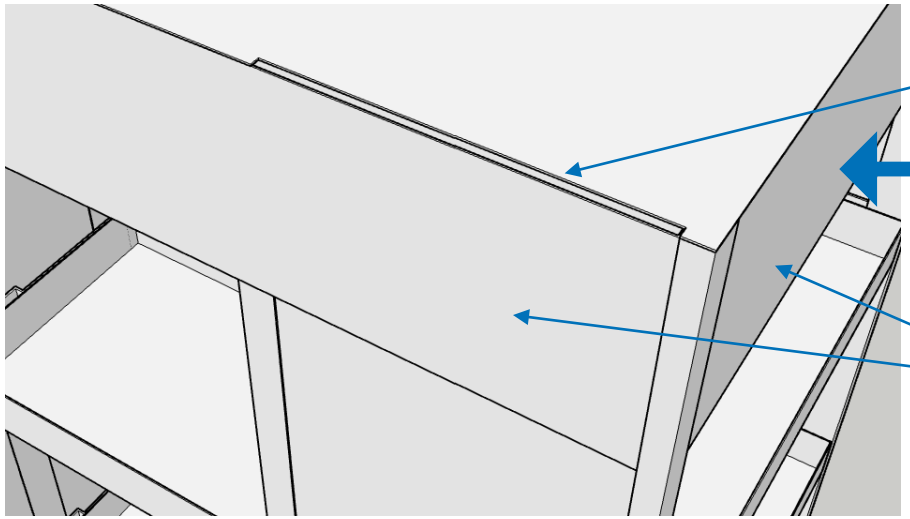

Cut-out in top cap piece to allow card graphic to pass through


Metal header section to receive mag-graphic or separate card graphic holder

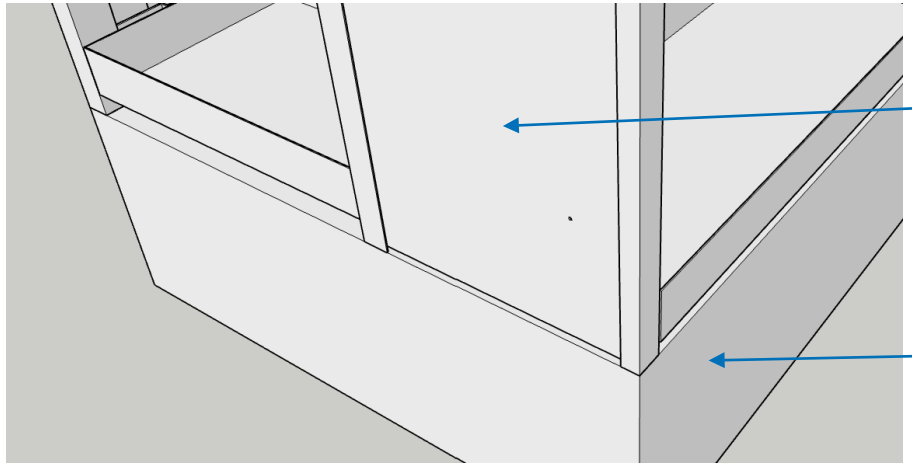

Graphic holder pocket created by the corner profiles. The graphic also conceals any puddle welds or rivets

Mag-graphic could be used on the base plinth, but it would be susceptible to damage. Further design consideration would be required

Card graphics used to change the BVI

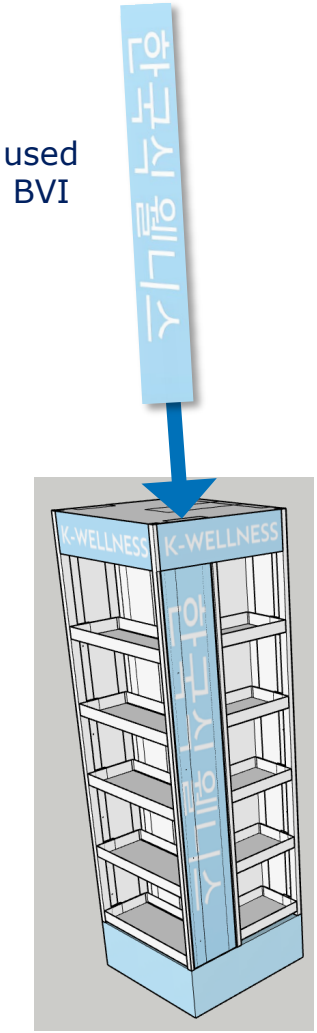

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Sustainability & electrical power

The environment and power consumption should always be considered when creating new fixtures.

As part of your submission, please use any Boots BAU kit where possible as well as suggestions from existing suppliers or partners. Please estimate electrical power consumption into your response.

All electrical items such as digital screens and illuminated lightboxes must comply with Boots electrical standards (TBGE1).

All components and assemblies will need to be designed in such a way where they can be broken down into their individual parts to be recycled or repurposed. End of life must be considered. Please include this in your response to brief.

A Sustain® environmental design assessment will be required for the final design.

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Scope and forecast

This brief is associated with the implementation of 200 K-Wellness card fixtures. The metal version will replace the card units. Therefore, please base all prices on a Qty of 200.

However, it is understood that the design would be adopted by other categories and could lead to other significant orders in time.

For indicative costings you will need to take this into consideration with regards volume and different manufacturing locations. UK, Europe & Asia. For this brief, please provide prices for the above multiplied by the following - Qty 1 of each variant (prototype*), Qty 10 (top-up) & Qty 200 (rollout).
**Prototype location could be China or UK (3D room D90).*

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Transport and installation

With any new fixture design, its important to think of all considerations. Please consider how the new kit will be manufactured, transported to a Boots logistics location (SEC), stored and then called off on layout drawings. Finally, how will the new kit get assembled and fitted instore by contractors.

Please consider pallet sizes, protective packaging during transit, weights, manual handling and box labelling.

Installation guides and O&M manuals will be required along with contractor training sessions.

SEC New Line Forms will be processed on agreement of final technical specifications.

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Durability and testing

Designing furniture for a retail environment requires careful choice of materials and finishes. The creative design intent must be married with a durable and cost-effective solution.

Please also explore Class 0 fire rated options for use in airports and railway stations where the landlord may have specific fixture requirements. (Bespoke kit quantities).

All materials must be able to withstand the H&S test criteria listed in the BFDG and day-to-day wear and tear. Design with a product lifetime of 7 years. Where possible, please design spare parts and replaceable or updatable parts into the overall design.

All fixtures supplied to Boots will have a manufacturers warranty to allow for any manufacturing errors or defects. This warranty period will be determined at the point of award with our procurement team. Maintenance support will be required when the warranty period has expired.

All designs to be tested in accordance with section 5 of the BFDG by the supplier.

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Response requirements

As part of your response to this brief, we need you to provide the following:

- Project timeline with key dates highlighted and annotated (CPA)
- Option to include indicative drawings, 2D or 3D visuals and/or sketches
- Detailed development costings for all necessary drawings, prototypes and development test rigs or mock-ups
- Estimated transport, delivery and installation to Boots store equipment centre at Castleford (SEC)
- Estimated rollout costs with pricing breaks at quantities detailed on page 17, plus 5% spares.
- Any examples of similar projects you have worked on, or category insights will be beneficial but not essential
- Prototype review and production inspection session dates and locations to be highlighted where possible
- All display aids are being managed separately

Project stakeholders:

- Trading – Heather Cronshaw
- Merchandising – TBC
- Retail Ops – TBC
- Commercial Ops – TBC
- Loss – Chris Hatfield
- Design Development – Richard Harris
- In Store Experience – Victoria Bradley
- Project Delivery – TBC

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Response requirements

Although this was the estimated time scale to land this proposition, we would encourage the successful supplier to expediate any timings where possible.

Timings:

- Technical brief submitted - 5th October 2026
- Formal RTB with indicative timings, costs and design direction – 26th October 2026
- Boots ISE and ISM briefing for artwork - 2nd November 2026
- Technical CAD sign off - 7th December 2026
- Prototype sign off - 5th Jan 2027
- Manufacture starts - 11th Jan 2027
- Delivery from China starts – 1st March 2027
- K&L (SEC) – 12th April 2027
- Implementation starts – 26th April 2027

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Response requirements

General Minimum Requirements Summary

- Compatible with existing FSDU footprint sizes (500x500mm)
- To deliver a practical and efficient solution that is easily scalable
- Solution to be modular based on core furniture components
- Must be implemented with an efficient top level SKU structure that also allows for spares and bolt-on elements
- Materials – must suite in with new Wellness Boots BVI and other new concept direction included in this brief
- Longevity – must be designed to last minimum 7 years instore
- Fixtures should be designed for ease of transportation and installation. To include stores with no lift access to multi-story floors.
- Display must be operationally easy – drawer lock mechanism, tool and address ongoing maintenance repairs where necessary.
- Must include interchangeable comms mechanic for overall product range (By brand)
- Design solution should explore utilisation of existing fixtures and fittings (Electrical components in particular)
- All components and assemblies to conform to the Boots Design Standards (BFDG v6)
- Successful D&D agency to provide the following documentation
    - GA drawings including construction method details, materials, dimensions and weight
    - All 2D & 3D CAD data
    - O&M manual detailing maintenance instructions
    - Risk Assessment document to list H&S risk mitigation
    - H&S test reports
- Supplier to obtain POPAI Sustain report & TBGE1 electrical certification where necessary
- All kit manufactured must be delivered on time via agreed logistics/installation partner
- All design intellectual property rights remain with Boots at all design development stages

© 2025 The Boots Group. All rights reserved. Confidential and Proprietary information. For internal use only.

Thank you

Richard Harris

Design & Development Manager

Specification and Supply Chain Team (Property)

Mobile: +44 07900 705 033

Email: richard.harris1@boots.com

The Boots Group